


METRIC EXTRUDED O-RING CORD STOCK

Extruded O-Ring cord is used whenever a standard size O-Ring will not fit a particular groove, or when a split O-Ring is required for the application. O-Ring cord can be trimmed to any length, providing a custom fit. Sold by the foot or spool.

Also available in inch sizes (See ORC).

*The standard compound for this seal is N6001.
It is also available in N6003, V7525 and V7550.*

*For compound descriptions and temperature ranges,
please refer to pages 20 - 37.*

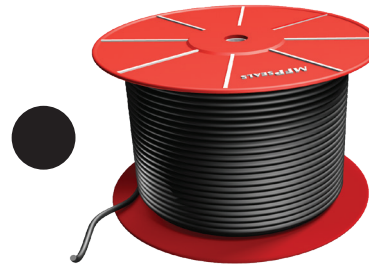

MFP PART NUMBER

MORC-1.0N6001

SEAL TYPE CROSS SECTION COMPOUND

MORC

METRIC O-RINGS

EXTRUDED O-RING CORD STOCK		
MFP PART NUMBER	C/S	TOL +/-
MORC-1.0	1.0 MM	.13 MM
MORC-1.6	1.6 MM	.13 MM
MORC-2.0	2.0 MM	.13 MM
MORC-2.4	2.4 MM	.13 MM
MORC-2.5	2.5 MM	.13 MM
MORC-3.0	3.0 MM	.13 MM
MORC-3.5	3.5 MM	.18 MM
MORC-4.0	4.0 MM	.18 MM
MORC-4.5	4.5 MM	.18 MM
MORC-5.0	5.0 MM	.18 MM
MORC-5.7	5.7 MM	.18 MM
MORC-6.0	6.0 MM	.18 MM
MORC-6.5	6.5 MM	.18 MM
MORC-7.0	7.0 MM	.18 MM
MORC-7.5	7.5 MM	.18 MM
MORC-8.0	8.0 MM	.25 MM
MORC-8.4	8.4 MM	.25 MM
MORC-9.0	9.0 MM	.25 MM
MORC-10.0	10.0 MM	.25 MM
MORC-11.0	11.0 MM	.25 MM
MORC-12.0	12.0 MM	.25 MM
MORC-13.0	13.0 MM	.25 MM
MORC-14.0	14.0 MM	.40 MM
MORC-15.0	15.0 MM	.40 MM
MORC-16.0	16.0 MM	.40 MM
MORC-18.0	18.0 MM	.50 MM
MORC-20.0	20.0 MM	.50 MM
MORC-24.0	24.0 MM	.50 MM
MORC-25.0	25.0 MM	.90 MM