


EXTRUDED O-RING CORD STOCK

Extruded O-Ring cord is used whenever a standard size O-Ring will not fit a particular groove, or where a split O-Ring is required for the application. O-Ring cord can be trimmed to any length, providing a custom fit. Sold by the foot or spool.

Also available in metric sizes (See MORC).

*The standard compound for this seal is N6001.
It is also available in N6003, V7525 and V7550.*

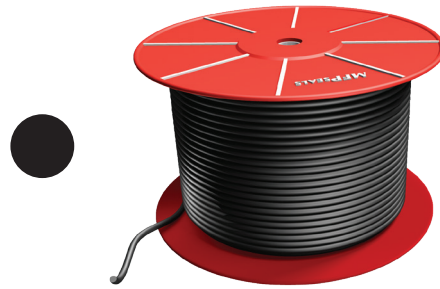

MFP PART NUMBER

ORC-070N6001
SEAL TYPE | CROSS SECTION | COMPOUND

ORC

O-RINGS

MFP PART NUMBER	EXTRUDED O-RING CORD STOCK		
	NOMINAL	ACTUAL	TOL +/-
ORC-070	0.062	0.070	0.005
ORC-093	0.937	0.093	0.005
ORC-103	0.937	0.103	0.005
ORC-125	0.125	0.125	0.005
ORC-139	0.125	0.139	0.005
ORC-156	0.156	0.156	0.007
ORC-187	0.187	0.188	0.007
ORC-210	0.187	0.210	0.007
ORC-250	0.250	0.250	0.007
ORC-275	0.250	0.275	0.007
ORC-313	0.312	0.313	0.010
ORC-375	0.375	0.375	0.010
ORC-437	0.437	0.437	0.010
ORC-500	0.500	0.500	0.010
ORC-625	0.625	0.625	0.015
ORC-750	0.750	0.750	0.015
ORC-1000	1.000	1.000	0.020