




EXTRUDED X-RING CORD STOCK

Extruded X-Ring cord is used whenever a standard size X-Ring will not fit a particular groove, or where a split X-Ring is required for the application. X-Ring cord can be trimmed to any length, providing a custom fit. Sold by the foot or spool.

*The standard compound for this seal is N6001.
It is also available in N6003.*

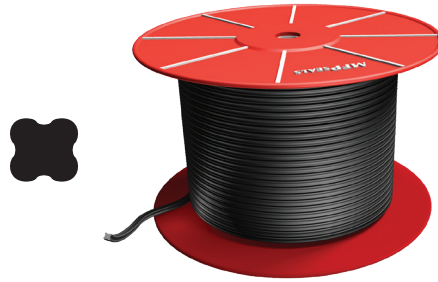

XRC

MFP PART NUMBER

XRC-210N6001

SEAL TYPE | COMPOUND
CROSS SECTION

MFP PART NUMBER	NOMINAL	EXTRUDED O-RING CORD STOCK	
		ACTUAL	TOL +/-
XRC-103	0.093	0.103	0.008
XRC-139	0.125	0.139	0.008
XRC-210	0.187	0.210	0.011
XRC-275	0.250	0.275	0.016
XRC-406	0.375	0.406	0.020

O-RINGS