




**DF ROD WIPER**

MFP Seals' DF rod wiper is an aggressive wiper designed to retro-fit D Style housings. Designed for use in harsh environments, particularly for Longwall Mining, Agriculture, Off-Highway, Waste Management, and Forestry use.


MFP's DF wiper offers a vented heel to eliminate the possibility of pressure traps between the rod seal and wiper. DF wipers feature a protective flange to shield the housing from contaminants. Easy to install and available in several compounds to meet your application's needs.

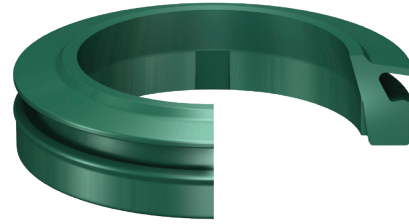

The standard compound for this seal is U2150.  
It is also available in U2151 and U4150.

For compound descriptions and temperature ranges, please refer to pages 26-37.

DF STYLE

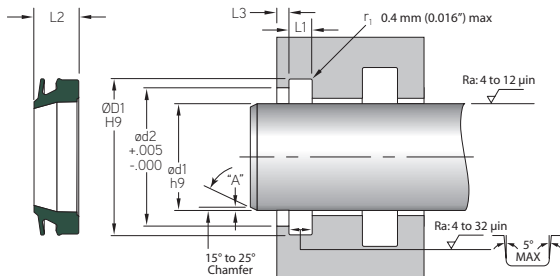

**MFP PART NUMBER**

**DF-1125U2150**

SEAL TYPE      DASH #      COMPOUND

For non-standard groove sizes, see MFP Seals' HMW (Inch) or MHMW (Metric) Rod Wiper.

Max. Velocity: 4.0 m/s (< 12 ft./s)

MFP PART NUMBER	ROD APPLICATION					
	ød1	ØD1	L1	ød2	L2	L3
<b>TOLERANCE</b>	h9	H9	+0.004/-0.000	+0.005/-0.000		
DF-1125	1.125	1.497	0.187	1.370	0.350	0.094
DF-1250	1.250	1.622	0.187	1.495	0.350	0.094
DF-1375	1.375	1.747	0.187	1.620	0.350	0.094
DF-1500	1.500	1.872	0.187	1.745	0.350	0.094
DF-1625	1.625	1.997	0.187	1.870	0.350	0.094
DF-1750	1.750	2.122	0.187	1.995	0.350	0.094
DF-2000	2.000	2.497	0.249	2.327	0.450	0.125
DF-2250	2.250	2.747	0.249	2.577	0.450	0.125
DF-2500	2.500	2.997	0.249	2.827	0.450	0.125
DF-2750	2.750	3.247	0.249	3.077	0.450	0.125
DF-3000	3.000	3.497	0.249	3.327	0.450	0.125
DF-3500	3.500	3.997	0.249	3.827	0.450	0.125
DF-4000	4.000	4.497	0.249	4.327	0.450	0.125
DF-4500	4.500	5.247	0.374	4.993	0.674	0.187
DF-5000	5.000	5.747	0.374	5.493	0.674	0.187
DF-5500	5.500	6.247	0.374	5.993	0.674	0.187
DF-6000	6.000	6.747	0.374	6.493	0.674	0.187
DF-7000	7.000	7.747	0.374	7.493	0.674	0.187

ROD WIPERS