

Shown in T5100.  
Other materials are available.

# PTFE BEARING TAPE

MFP Seals produces Proprietary, Tight Tolerance, PTFE Bearing Tape that is designed to eliminate scoring, in hydraulic and pneumatic cylinder applications, by preventing metal to metal contact. Our Bronze Filled PTFE compound provides excellent light-duty, low friction performance.


MFP Seals has the know-how to make the best quality skived PTFE products on the market today. Precision crafted into rolls, our Bearing Tapes are made with the most up-to-date skiving technologies, and premium selection of raw materials. Our Bearing Tapes can be produced from 0.063" up to 0.125" thick (from 1.5 to 4 mm), in widths from 0.25" up to 2" (from 3 to 49.8 mm).

Contact MFP Seals today, for more information, or to place an order for our Tight Tolerance, Bronze Filled, PTFE Bearing Tape. Your equipment will appreciate it.

Ordering is easy, just select a Thickness (C/S) and the Width (L2). Be sure to double check your Groove Width for clearance (L1). The roll length will be determined by the Thickness (C/S).

The data provided is based on laboratory testing and is proposed to technical designers as possible and useful advice. Deviations from the values indicated may occur, but they do not constitute themselves either detriment of quality or reason for rejection.

## BRONZE FILLED

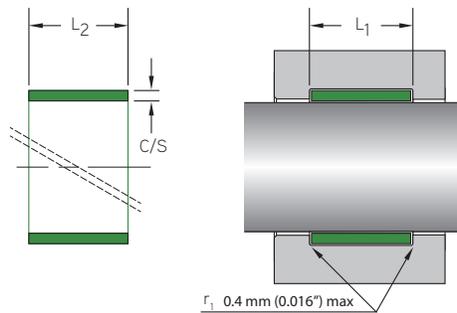

## PTFE Bearing Tape - Inch

Thickness (C/S)	Roll Length
+ .000/- .002	
0.063"	115 Ft.
0.094"	66 Ft.
0.125"	52 Ft.

Width (L2)	Groove (L1)
+ .000/- .010	+ .020/- .000
0.250"	0.260"
0.375"	0.385"
0.500"	0.510"
0.625"	0.635"
0.750"	0.760"
1.000"	1.010"
1.250"	1.260"
1.500"	1.510"
1.750"	1.760"
2.000"	2.010"

\* 1.5 mm C/S only \*\* 2 & 2.5 mm C/S only

## PTFE Bearing Tape - Metric

Thickness (C/S)	Roll Length
+ .00/- .05	
1.5	115 Ft.
2	82 Ft.
2.5	66 Ft.
3	53 Ft.
3.5	92 Ft.
4	79 Ft.

Width (L2)	Groove (L1)
+ .00/- .20	+ .20/- .00
* 3	3.2
** 3.8	4
5.4	5.6
5.6	5.8
6	6.2
6.1	6.3
7.9	8.1
8	8.2
9.5	9.7
9.7	9.9
10	10.2
11.8	12
12.8	13
13	13.2
13.8	14
14	14.2
14.8	15
15	15.2
19.8	20
20	20.2
24.8	25
25	25.2
34.8	35
49.8	50

**MFPSEALS**<sup>®</sup>  
MARTIN FLUID POWER

For more information, or to place an order contact:  
Corporate Headquarters  
900 E. Whitcomb Ave., Madison Heights, MI 48071  
(248) 585-8170 · sales@mfpseals.com  
[www.mfpseals.com](http://www.mfpseals.com)