




HYDROWYPE


**A-SERIES, AC STYLE-2
ROD SCRAPER**

Field-retrofit scrapers. Fully broken, 2-piece scraper bodies, with serpentine retainer spring.

Style-2 provides a scraping body with a narrow groove accommodating a 302 stainless steel serpentine form spring to generate scraping load. The spring is installed in a groove on OD of the scraper body (springs do not contact the rod).

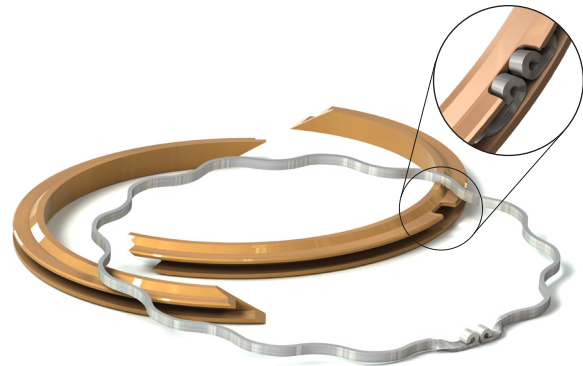

AC

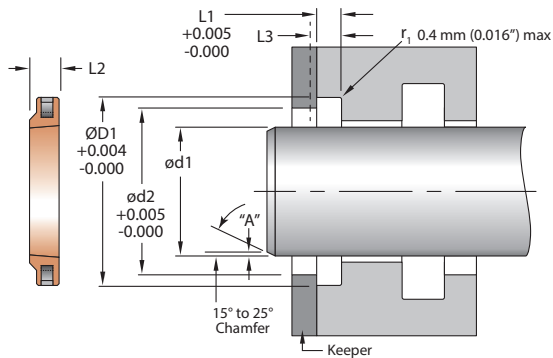

Scrapers are typically held in place by a Keeper/Follower plate or Retaining Ring.

HYDROWYPE PART NUMBER

AC-01-2C
SEAL TYPE DASH# STYLE FINISH

FINISH DESIGNATION

B = UNFINISHED* N = NICKEL
C = CADMIUM (Standard) Z = ZINC

*Unfinished parts are susceptible to oxidation and should not be stored for long periods without appropriate treatment. Parts will be shipped in plastic bags with light coating of machine oil to prevent corrosion.

PART NUMBER	ROD APPLICATION				
	ød1	ØD1	ød2	L1	L3
.105" - GROOVE	NOMINAL	+0.004/-0.000	+0.005/-0.000	+0.005/-0.000	+0.005/-0.000
AC-16	1.438	1.739	1.605	0.104	0.135
AC-17	1.500	1.802	1.668	0.104	0.135
AC-18	1.625	1.927	1.793	0.104	0.135
AC-19	1.750	2.052	1.918	0.104	0.135
AC-20	1.875	2.177	2.043	0.104	0.135
AC-21	2.000	2.302	2.178	0.104	0.135
AC-22	2.125	2.427	2.303	0.104	0.135
AC-23	2.250	2.552	2.428	0.104	0.135
AC-24	2.375	2.677	2.553	0.104	0.135
AC-25	2.500	2.802	2.678	0.104	0.135
.119" - GROOVE	NOMINAL	+0.004/-0.000	+0.005/-0.000	+0.005/-0.000	+0.005/-0.000
AC-26	2.625	2.989	2.834	0.119	0.150
AC-27	2.750	3.114	2.959	0.119	0.150
AC-28	2.875	3.239	3.084	0.119	0.150
AC-29	3.000	3.364	3.209	0.119	0.150
AC-30	3.125	3.489	3.334	0.119	0.150
AC-31	3.250	3.614	3.459	0.119	0.150
AC-32	3.375	3.739	3.584	0.119	0.150
AC-33	3.500	3.864	3.709	0.119	0.150
AC-34	3.625	3.989	3.834	0.119	0.150
AC-35	3.750	4.114	3.959	0.119	0.150
AC-36	3.875	4.239	4.084	0.119	0.150


ROD SCRAPERS



A-Series, AC Rod Scraper - Style-2


Medium Duty

AC

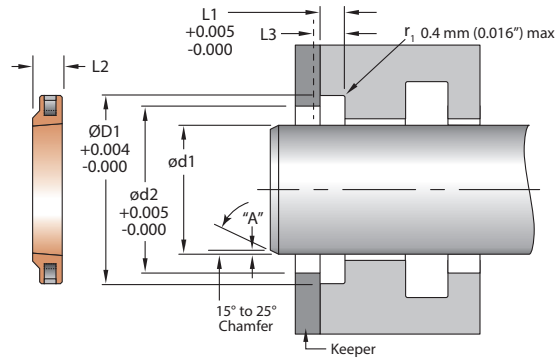

PART NUMBER	ROD APPLICATION				
	ød1	ØD1	ød2	L1	L3
.104" - GROOVE	NOMINAL	+0.004/-0.000	+0.005/-0.000	+0.005/-0.000	+0.005/-0.000
AC-37	4.000	4.427	4.240	0.135	0.166
AC-38	4.125	4.552	4.365	0.135	0.166
AC-39	4.250	4.677	4.490	0.135	0.166
AC-40	4.375	4.802	4.615	0.135	0.166
AC-41	4.500	4.927	4.740	0.135	0.166
AC-42	4.625	5.052	4.865	0.135	0.166
AC-43	4.750	5.177	4.990	0.135	0.166
AC-44	4.875	5.302	5.115	0.135	0.166
AC-45	5.000	5.427	5.240	0.135	0.166
AC-46	5.125	5.552	5.365	0.135	0.166
AC-47	5.250	5.677	5.490	0.135	0.166
AC-48	5.375	5.802	5.615	0.135	0.166
AC-49	5.500	5.927	5.740	0.135	0.166
.151" - GROOVE	NOMINAL	+0.004/-0.000	+0.005/-0.000	+0.005/-0.000	+0.005/-0.000
AC-50	5.625	6.114	5.896	0.151	0.182
AC-51	5.750	6.239	6.022	0.151	0.182
AC-52	5.875	6.364	6.146	0.151	0.182
AC-53	6.000	6.489	6.272	0.151	0.182
AC-54	6.250	6.739	6.522	0.151	0.182
AC-55	6.500	6.989	6.772	0.151	0.182
AC-56	6.750	7.239	7.022	0.151	0.182
AC-57	7.000	7.489	7.272	0.151	0.182
AC-58	7.250	7.739	7.522	0.151	0.182
AC-59	7.500	7.989	7.772	0.151	0.182
AC-60	7.750	8.239	8.022	0.151	0.182
AC-61	8.000	8.489	8.272	0.151	0.182
AC-62	8.500	8.989	8.772	0.151	0.182
AC-63	9.000	9.489	9.272	0.151	0.182
AC-64	9.500	9.989	9.772	0.151	0.182
AC-65	10.000	10.489	10.272	0.151	0.182
AC-66	10.500	10.989	10.772	0.151	0.182
AC-67	11.000	11.489	11.272	0.151	0.182

ROD SCRAPERS

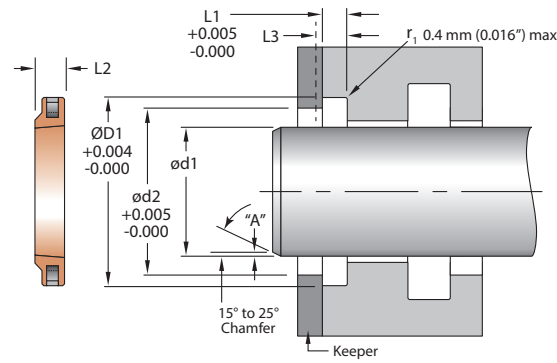

AC

PART NUMBER	ROD APPLICATION				
	ød1	ØD1	ød2	L1	L3
.166" - GROOVE	NOMINAL	+0.004/-0.000	+0.005/-0.000	+0.005/-0.000	+0.005/-0.000
AC-68	11.500	11.989	11.772	0.166	0.197
AC-69	12.000	12.489	12.272	0.166	0.197
AC-70	12.500	12.989	12.772	0.166	0.197
AC-71	13.000	13.489	13.272	0.166	0.197

ROD SCRAPERS