



O-PAC® Loaded B-Lip - Symmetrical U-Cup

A product of MFP Seals.


MFPSEALS®
www.mfpseals.com

OP - O-PAC® B-LIP

OP - O-PAC® LOADED B-LIP SYMMETRICAL U-CUP

O-PAC® U-Cups are a very versatile reciprocating seal design, for use up to 350 bar (5,000 psi). The rubber expander creates a compression style seal while still operating as a pressure actuated U-Cup design. The result is better low-pressure sealing and less startup leakage. The primary function of a B-Lip O-PAC® is for linear rod applications. However, they can also be used for piston applications when straight lip tooling is not available. MFP Seals' O-PAC® U-Cups feature a knife trimmed sealing lip for increased sealability.

*This seal is available in the following compounds:
U2145, U2150, U2151, U2162, U4150, H2155,
V7675, N6021, N6023, N6034, with an
Expander in N6014, V7100 or V7155.*

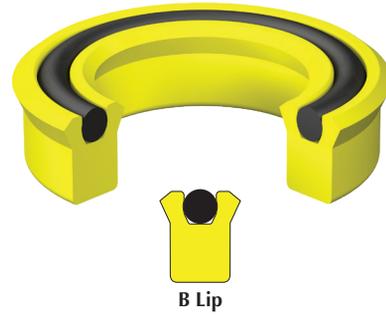


MFP PART NUMBER

OP-375-01.000-375BU2145


SEAL TYPE | CROSS SECTION | ød1 | L2 | PROFILE STYLE | COMPOUND

PROFILE STYLE CODES: B = B Lip, No Code for Straight Lip (Standard)


PROFILE



ROD APPLICATION

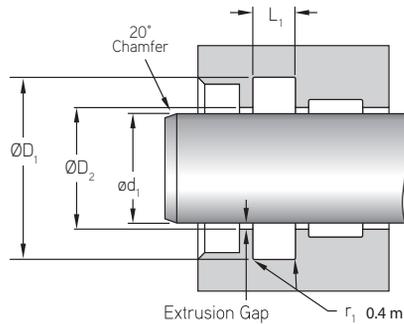

PISTON APPLICATION

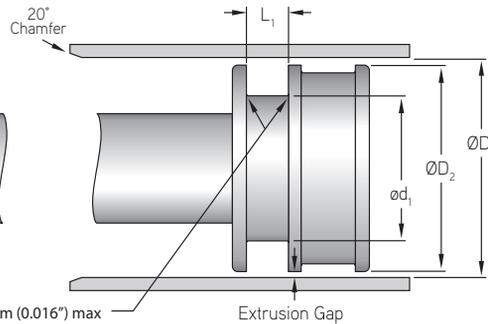

Pressure: 350 bar (5,000 psi)

Max. Velocity: 0.5 m/s (< 1.6 ft./s)

Contact your MFP Seals Sales Representative for available sizes.

U-CUP SYMMETRICAL