





XPAR - X-PAC®

**XPAR - X-PAC® LOADED U-CUP
WITH ANTI-EXTRUSION RING**

XPAR B-Lip X-PAC® U-Cup is a versatile reciprocating seal for linear rod applications, up to 400 bar (5,800 psi). The rubber expander creates a compression style seal while still operating as a pressure actuated U-Cup design. The result is better low-pressure sealing and less startup leakage. The XPAR X-PAC® has an Anti-Extrusion Ring to prevent seal extrusion. MFP Seals' X-PAC® U-Cups feature a knife trimmed sealing lip for increased sealability.

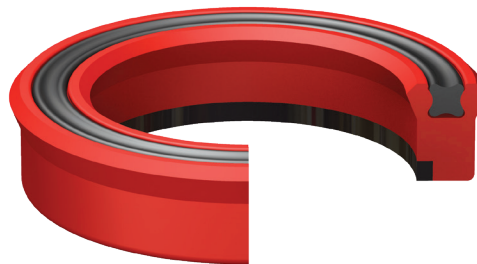

The standard compound for this seal is U2151, with an N6014 Expander and M1001 Anti-Extrusion Ring.

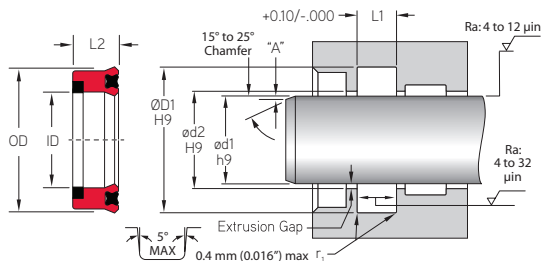

MFP PART NUMBER

XPAR-187-01.000-375BU2151
SEAL TYPE | CROSS SECTION | ød1 | L2 | PROFILE STYLE | COMPOUND

Pressure: 400 bar (5,800 psi)

Max. Velocity: 0.5 m/s (< 1.6 ft./s)

MFP BASE PART NUMBER	PROFILE STYLE	ROD APPLICATION				
		ød1	ød2	ØD1	L1	L2
.187" - CROSS SECTION WIDTH		h9	H9	H9	+0.10/-0.000	
XPAR-187-01.000-375B	B Lip	1.000	1.001	1.375	0.413	0.375
XPAR-187-01.250-375B	B Lip	1.250	1.251	1.625	0.413	0.375
XPAR-187-01.375-375B	B Lip	1.375	1.376	1.750	0.413	0.375
XPAR-187-01.500-375B	B Lip	1.500	1.501	1.875	0.413	0.375
XPAR-187-01.750-375B	B Lip	1.750	1.751	2.125	0.413	0.375
XPAR-187-02.000-375B	B Lip	2.000	2.001	2.375	0.413	0.375
XPAR-187-02.250-375B	B Lip	2.250	2.251	2.625	0.413	0.375
XPAR-187-02.375-375B	B Lip	2.375	2.376	2.750	0.413	0.375
XPAR-187-02.500-375B	B Lip	2.500	2.501	2.875	0.413	0.375
.250" - CROSS SECTION WIDTH		h9	H9	H9	+0.10/-0.000	
XPAR-250-01.500-375B	B Lip	1.500	1.501	2.000	0.413	0.375
XPAR-250-01.750-375B	B Lip	1.750	1.751	2.250	0.413	0.375
XPAR-250-02.000-375B	B Lip	2.000	2.001	2.500	0.413	0.375
XPAR-250-02.250-375B	B Lip	2.250	2.251	2.750	0.413	0.375
XPAR-250-02.500-375B	B Lip	2.500	2.501	3.000	0.413	0.375
XPAR-250-02.750-375B	B Lip	2.750	2.751	3.250	0.413	0.375
XPAR-250-03.000-375B	B Lip	3.000	3.001	3.500	0.413	0.375
XPAR-250-03.250-375B	B Lip	3.250	3.251	3.750	0.413	0.375
XPAR-250-03.500-375B	B Lip	3.500	3.501	4.000	0.413	0.375
XPAR-250-03.750-375B	B Lip	3.750	3.751	4.250	0.413	0.375
XPAR-250-04.000-375B	B Lip	4.000	4.001	4.500	0.413	0.375

U-CUP ASYMMETRICAL ROD SEALS